


# BULLARUM SI-6

# BULLARUM SI-6

706 mm - 9.11 mm / 27.8" - 35.9"  
946 mm - 1311 mm / 37.2" - 51.6"

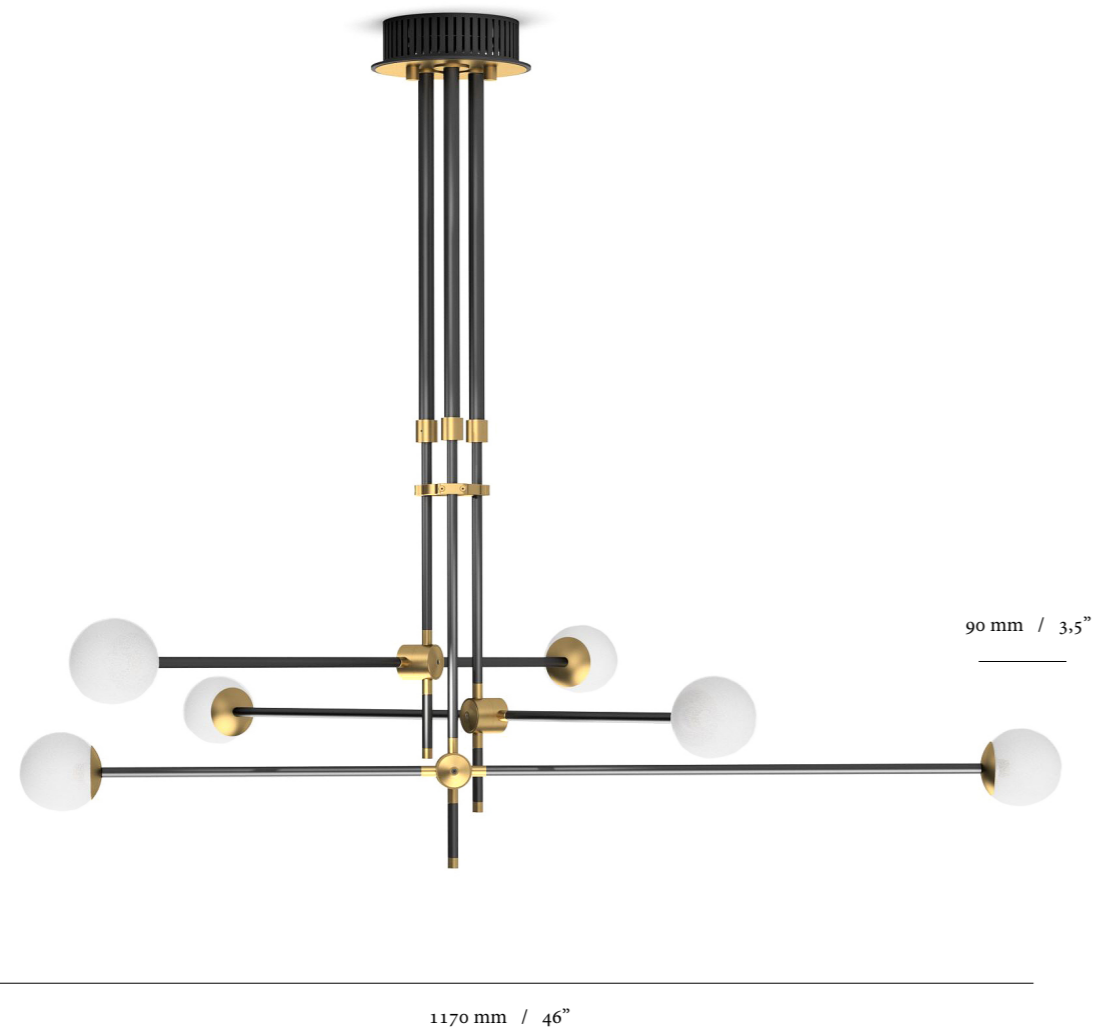

The sizes could change in case of changing the position of the arms!

## DIMENSION:

### BULLARUM SI-6 /300

1170 mm X 1170 mm X (706 mm - 911 mm)  
46" X 46" X (27.8" - 35.9")

### BULLARUM SI-6 /420

1170 mm X 1170 mm X (946 mm - 1311 mm)  
46" X 46" X (37.2" - 51.6")

GLASS GLOBE : 90 mm / 3,5"

OPTION : 135 mm / 5,3"

## CANOPY:

180 mm / 7,1" (WITH TRANSFORMERS)

## MATERIALS:

BRASS OR COPPER BODY, HAND - BLOWEN GLASS

## HALOGEN ILLUMINATION: (120V / 240V)

Socket : G6,35

Bulb : 6 x 35 Watts halogen

Wattage : 210 Watts

Lumens : 2400 Lumens

Color temperature : 2900K

Energy classes : C

Dimmable : yes

## LED ILLUMINATION: (120V / 240V)

Socket : G4

Bulb : 6 x 2 Watts LED

Wattage : 12 Watts

Lumens : 1200 Lumens

Color temperature : 3000K

Energy classes : A+ **LED**

Dimmable : not

## TRANSFORMERS TYPE:

LIGHTTECH LET 75 12V /230-240V (EU)

LIGHTTECH LET 75 12V /110-120V (US)

MEAN WELL APV-8-12 /90-264V (LED)

## WEIGHT:

15KG / 33 lbs

## PACKAGING WEIGHT:

50KG / 110 lbs

## PACKAGING: (WOODEN BOX)

1350 mm X 1100 mm X 220 mm

53,1" X 43,3" X 8,6"

## FINISHES: (THE BASIC FINISHED)

BRASS - POLISHED, BRASHED, ANTIQUE

COPPER - POLISHED, BRASHED

CROME

BLACK OR WHITE (POWDER COATED)

ORDER OPTIONS THE ALL FINISHES, AND

RAL COLORS

## CERTIFICATION:

CE certification of european conformity

UL approved components

## LEAD TIME: 4-5 WEEKS

- MUST BE INSTALLED BY AN ELECTRICIAN;

- ADDITIONAL CHARGES FOR MODIFICATIONS OR FOR SPECIAL ORDERS;

- DIMENSIONS ARE APPROXIMATE AND MAY VARY SLIGHTLY.